

# Technical Data Sheet 0805 Package Chip LEDs

#### 17-21/BHC-AN1P2/3T

#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.

#### **Descriptions**

- The 17-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

#### **Applications**

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

#### **Device Selection Guide**

	Lens Color	
Material	Material Emitted Color	
InGaN	Brilliant Blue	Water Clear



Everlight Electronics Co., Ltd.

Device No: DSE-171-B03


http://www.everlight.com

Prepared date: 2004.08.06

Rev 1.0

Page: 1 of 10

#### **Package Outline Dimensions**

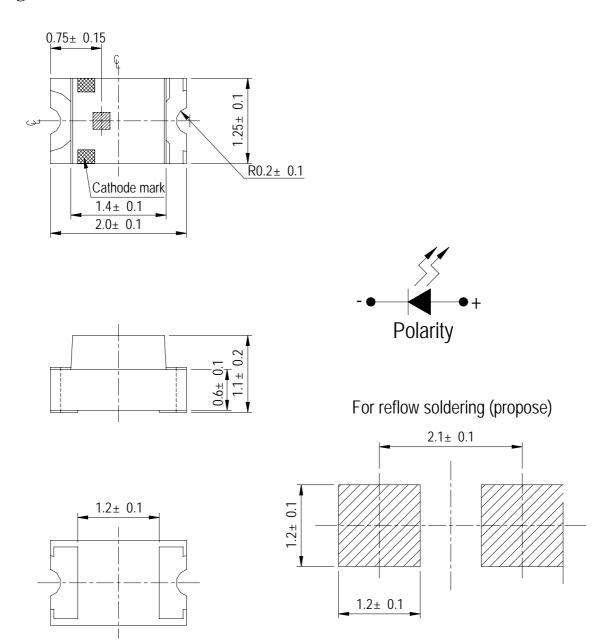

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd.

Device No: DSE-171-B03

http://www.everlight.com

Prepared date: 2004.08.06

Rev 1.0

Page: 2 of 10



### **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Reverse Voltage	$V_R$	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 ~ +85	$\mathbb{O}_{\!\!\!\circ}$
Storage Temperature	Tstg	-40~ +90	$^{\circ}\! \mathbb{C}$
Soldering Temperature	Tsol	260 (for 5 second)	$^{\circ}\!\mathbb{C}$
Electrostatic Discharge	ESD	150	V
Power Dissipation	Pd	110	mW
Peak Forward Current (Duty 1/10 @1KHz)	IFP	100	mA

### **Electro-Optical Characteristics (Ta=25°C)**

						1
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	28.5		72	mcd	
Viewing Angle	2 \theta 1/2		140		deg	
Peak Wavelength	λр		468		nm	
Dominant Wavelength	λd	464.5		476.5	nm	I <sub>F</sub> =20 mA
Spectrum Radiation Bandwidth	Δλ		20		nm	
Forward Voltage	VF		3.5	4.0	V	
Reverse Current	IR			50	μΑ	V <sub>R</sub> =5V

#### **Notes:**

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd. Rev 1.0 Page: 3 of 10 http://www.everlight.com Device No: DSE-171-B03

Prepared date: 2004.08.06 Prepared by: ForrestChen



# Bin Rang Of Dom. Wavelength

Groups	Bin	Min	Max	Unit	Condition
A	A9	464.5	467.5		IF=20mA
	A10	467.5	470.5	nm	
	A11	470.5	473.5		
	A12	473.5	476.5		

### **Bin Rang Of Luminous Intensity**

Bin	Min	Max	Unit	Condition
N1	28.5	36	mcd	mcd IF=20mA
N2	36	45		
P1	45	57		
P2	57	72		

#### **Notes:**


1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1.0 Page: 4 of 10

Device No: DSE-171-B03 Prepared date: 2004.08.06 Prepared by: ForrestChen

### **Typical Electro-Optical Characteristics Curves**

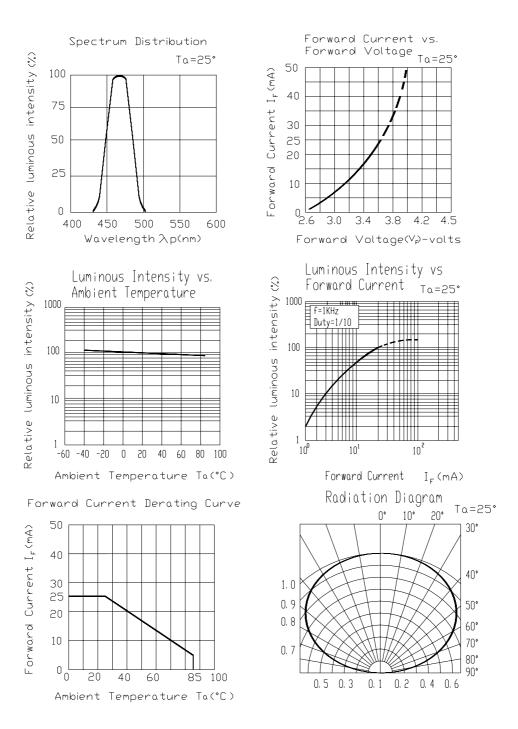

### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 



#### **Reel Dimensions**

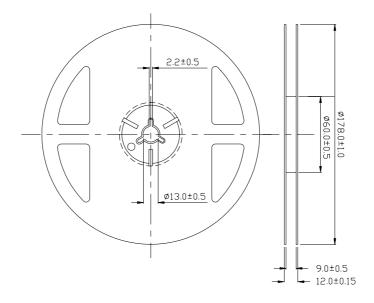

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd.

http://www.everlight.com


Rev 1.0

Page: 6 of 10

Device No: DSE-171-B03


Prepared date: 2004.08.06

## Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

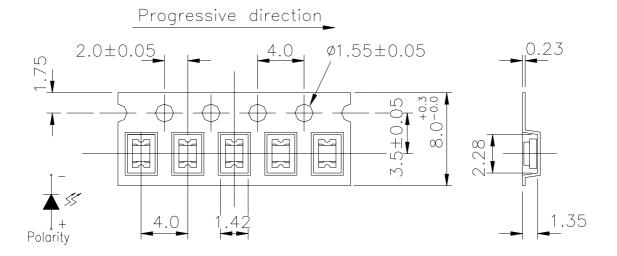

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

## **Moisture Resistant Packaging**

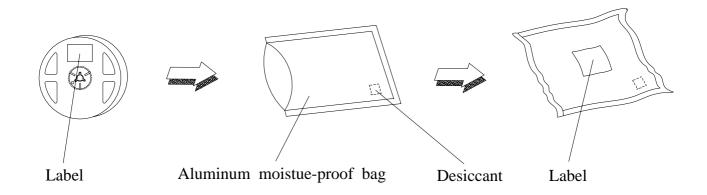

Everlight Electronics Co., Ltd.

Device No: DSE-171-B03

http://www.everlight.com

Prepared date: 2004.08.06

Rev 1.0

Page: 7 of 10



Page: 8 of 10

### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int$ 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min  ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1.0 Device No: DSE-171-B03 Prepared date: 2004.08.06 Prepared by: ForrestChen

#### **Precautions For Use**

#### 1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).


#### 2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment :  $60\pm5^{\circ}$ C for 24 hours.

#### 3. Soldering Condition

#### 3.1 Pb-free solder temperature profile

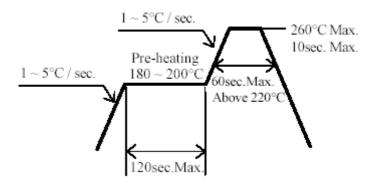

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1.0 Page: 9 of 10 Device No: DSE-171-B03 Prepared date: 2004.08.06 Prepared by: ForrestChen




#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $280^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

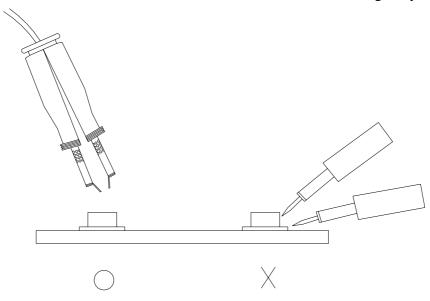

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1.0 Page: 10 of 10

Device No: DSE-171-B03 Prepared date: 2004.08.06 Prepared by: ForrestChen